

GSatSolar Series

Monitor Anything Under The Sun

Solar-Powered Satellite Tracker

A small, rugged, low-cost tracking device



Low Cost Asset Tracking

The low price makes it easy, sensible, & affordable to get started with any asset.



Compact Tracking Terminal

Small and light enough to go unnoticed, regardless of where or how you mount it.



Easy to Use

Start today with three easy steps:
Activate • Mount • Track



Powered by the Sun

Each unit is powered by a solar panel that recharges the battery.




Tough Enough for Outdoor Use

Rugged and reliable enough to track anything that moves.



Modular Mounting Options

Whether it has four legs or four wheels, there is a mount that will work for you.

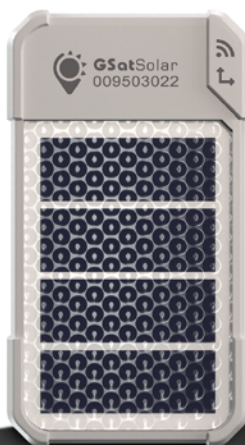

WHAT WILL **YOU** TRACK

SMART RANCHING

ADVENTURERS

MASSIVE IOT

GSatSolar

The GSatSolar was designed with the specific goal of providing the tracking market with a low-cost, compact, satellite-based terminal. Its design and functionality make it perfect for off-grid tracking of lower-cost assets, remote IoT operations, and livestock tracking. Adding data intelligence to these industries has previously yielded quandaries related to cost-effectiveness and network connectivity, each of which have been alleviated by the introduction of the GSatSolar.

Components

- Nordic core processor
- Solar Panel
- Rechargeable Battery
- GPS Receiver
- Embedded Satellite TX and GPS RX combined antenna
- Bluetooth Low Energy with embedded antenna
- Serial connector
- FCC, ISED, CE modular certification

Features

- Compact Tracking Device
- Solar-Powered
- Low-Cost Tracking
- Built Tough For Outdoor Use
- Ready Out-of-the-Box
- Modular Mounting Options
- Satellite Coverage



Specification Overview

Dimensions

Length: 57.1mm (2.25")
 Width: 31.8mm (1.25")
 Height: 17.8mm (0.70")

Weight

Terminal: 22.2 grams (0.783oz)
 Animal Ear Tag: 4 grams (0.141oz)
 Multipurpose Clip: 5 grams (0.176oz)

Charging Method

Solar

Solar Charge Rate

.125 watts

Battery

Type: Lithium Polymer
 Charge Time: Depends on sun exposure
 Capacity: 150mAh
 Lithium Content: 0.054grams(0.002oz)

Temperature

Max (recommended): 50C
 Min (recommended): -30C

Altitude

Range (recommended): 40,000 feet

Ingress Protection

IP Rating: IP68 (certification pending)
 Dust tight - no ingress of dust, complete protection against contact
 Liquid immersion up to 1M depth for 30 minutes

Transmitters/Chipsets

Transmitter Module FCC ID:
 L2V-ST100 IC: 3989A-ST100

GPS Chip: ZOE-M8
 BLE Chip: NRF 52832

GPS Receiver type:

72-channel u-blox M8 engine
 GPS/QZSS L1 C/A
 GLONASS L10F
 BeiDou B1I
 Galileo E1B/C