



u8 | ANTENNA

MAKING MOBILE GLOBAL

The new Kymeta™ u8 antenna is ready for integrators to create custom mobile satellite terminals to meet their customers' unique needs for connectivity while in motion.

Leveraging our revolutionary software-defined, electronic beam steering technology, the u8 antenna has been re-engineered for full coverage of the Ku band, increased antenna performance, and extended environmental coverage. All this while maintaining low power operation for seamless integration into mobile platforms.



ELECTRONICALLY STEERED ANTENNA

SOFTWARE-DEFINED, RECONFIGURABLE, AND UPDATABLE, THE U8 SATELLITE ANTENNA OPERATES OVER THE COMPLETE KU BAND.



DESIGNED FOR MOBILITY

LOW PROFILE AND AERODYNAMIC, THE U8 ANTENNA CAN BE EASILY INTEGRATED INTO TERMINALS DESIGNED FOR MOBILE PLATFORMS.



LOW POWER

WITH NATIVE DC OPERATION, THE U8 ANTENNA REQUIRES VERY LOW POWER TO POINT AND TRACK WHILE ON THE MOVE.



FLEXIBLE AND MODULAR

WITH SUPPORT FOR MULTI-WAVEFORM OPENAMP COMPATIBLE MODEMS, THE U8 ANTENNA CAN BE INTEGRATED INTO MANY UNIQUE SYSTEM CONFIGURATIONS.



LEO READY

THE U8 ANTENNA ANTICIPATES THE ARRIVAL OF KU-BAND LEO CONSTELLATIONS. THE U8 ANTENNA CAN BE UPDATED TO SUPPORT LEO OPERATION WHEN AVAILABLE.



u8 Antenna Specifications*

ANTENNA

BAND

Ku

ANTENNA TYPE

Electronically scanned array

APERTURE

RX and TX combined
82 cm active diameter

POLARIZATION

Linear, software-defined
(circular with software upgrade)

RX

RX FREQUENCY RANGE

10.7 GHz to 12.75 GHz

G/T BROADSIDE

Up to 11.25 dB/K

G/T @ 45° ELEVATION, TYPICAL LAND MOBILE

Up to 9.0 dB/K

RX INSTANTANEOUS BANDWIDTH

250 MHz

TX

TX FREQUENCY RANGE

13.75 GHz to 14.50 GHz

TX GAIN BROADSIDE

Up to 34.0 dBi

TX GAIN @ 45° ELEVATION, TYPICAL LAND MOBILE

Up to 32.0 dBi

CROSS-POLARIZATION ISOLATION

≥25 dB

TX INSTANTANEOUS BANDWIDTH

>62 MHz

TRACKING

SCAN ANGLES

Az 360°, El +15° to +90°

TRACKING RECEIVER TYPE

Integrated tracking system
DVB-S2, DVB-S2X

POWER

DC INPUT POWER

12 VDC to 24 VDC

POWER CONSUMPTION (NO MODEM, RF CHAIN)

35 W (typical), 450 W (peak)

MECHANICAL

DIMENSIONS

L 90 cm × W 90 cm × H 12.1 cm
L 35.5 in. × W 35.5 in. × H 4.8 in.

WEIGHT

~23.5 kg (~51.5 lb.)

OPERATIONAL TEMPERATURE

-40 °C to +70 °C (equivalent to
+55 °C + solar loading) with an
integrator air circulation solution

STORAGE TEMPERATURE

-40 °C to +85 °C

INGRESS PROTECTION

IP66

INTERFACES

NETWORK INTERFACE

Ethernet

RF CONNECTORS

N-type

WAVEGUIDE PORT

WR-75

COMPLIANCE

CERTIFICATIONS IN PROGRESS

CE, UL, RoHS, FCC

AVAILABLE CONFIGURATIONS

u8 ANTENNA **

- Flat-panel, full-duplex antenna
- Integrated radome
- Integrated antenna control unit (ACU)
- Integrated antenna power supply
- Satellite auto-acquisition and tracking capability
- All outdoor, robust IP66 rated enclosure

u8 OUTDOOR UNIT (ODU) **

- u8 antenna
- RF chain with 20 W low-profile BUC
- Shroud with integrated air circulation solution

AVAILABLE COMPONENTS


- Diplexer
- LNB
- 20 W low-profile BUC
- Cables

AVAILABLE ACCESSORIES

- Shroud
- Vehicle mount kit
- Vehicle power kit
- AC-to-DC power kit

AVAILABLE SOFTWARE-ENABLED FEATURES

- Manual positioning (GPS denied) mode
- Full privacy mode
- External GPS support

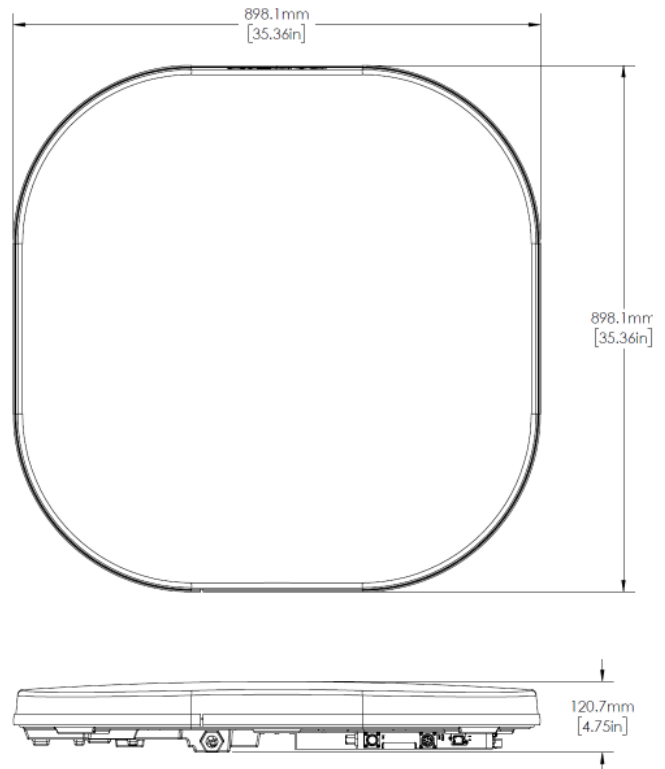

*Specifications as of 1 July 2020. Subject to change.

**For u7-to-u8 upgrades, contact sales@kymetacorp.com.

Note: Compliance with the 700-00107-000 Kymeta u8 products integrator guide is required to maintain warranty on the antenna. The integrator guide provides guidance on RF chain integration, modem integration, and proper thermal management.

MODEM COMPATIBILITY

iDirect Evolution and Velocity
compatible with X7, 950mp,
and iQ 200 routers

Newtec Dialog compatible
with MDM3310 and MDM2510
modems

Viasat ArcLight compatible with
CBM-400 modem

Gilat SkyEdge II-c compatible
with Capricorn-4 modem

Automatic acquisition possible
with systems supporting
OpenAMIP version 1.12

For more information, contact Kymeta at sales@kymetacorp.com.

12277 134th Ct. NE, Redmond, WA 98052 | Phone: 425.896.3700 | www.kymetacorp.com

© 2020 Kymeta Corporation. KYMETA and KYMETA CONNECT are trademarks of Kymeta Corporation, with registrations or pending applications for these marks in the U.S. and other countries. All other trademarks are the property of their respective owners.

KYMETA™

700-00071-000 revB